


# Conduit Bodies

## Malleable Iron Conduit Bodies for Rigid/IMC - Wet Locations Rated for Assembly

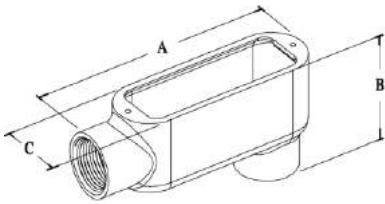


### LB Type

Size	Cat. #	Cat. # w/ Roller	Internal Volume Inch <sup>3</sup>	Dimensions						Max# of Conductors
				A		B		C		
				Inch	mm	Inch	mm	Inch	mm	
1/2"	LB-50M	-	4.5	4.69	119.1	2.18	55.4	1.36	34.5	N/A
3/4"	LB-75M	-	7.5	5.42	137.7	2.36	59.9	1.57	39.9	3 #6
1"	LB-100M	-	12.5	6.28	159.5	2.86	72.6	1.79	45.5	3 #4
1-1/4"	LB-125M	LBR-125M	32.3	8.12	206.2	3.49	88.6	2.52	64.0	3 #2
1-1/2"	LB-150M	LBR-150M	35.3	8.15	207.0	3.69	93.7	2.52	64.0	3 #1/0
2"	LB-200M	LBR-200M	73	10.53	267.5	4.52	114.8	3.15	80.0	3 #4/0
2-1/2"	LB-250M	LBR-250M	142	13.76	349.5	5.39	136.9	4.45	113.0	3 #300MCM
3"	LB-300M	LBR-300M	173	13.82	351.0	6.18	157.0	4.45	113.0	3 #400MCM
3-1/2"	LB-350M	LBR-350M	300	16.65	422.9	7.19	182.6	5.53	140.5	3 #500MCM
4"	LB-400M	LBR-400M	328	16.65	422.9	7.36	186.9	5.53	140.5	3 #500MCM

Conduit Bodies

### C Type

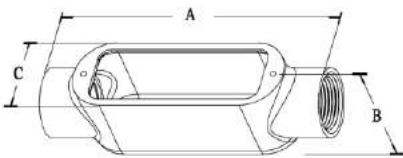

Size	Cat. #	Cat. # w/ Roller	Internal Volume Inch <sup>3</sup>	Dimensions						Max# of Conductors
				A		B		C		
				Inch	mm	Inch	mm	Inch	mm	
1/2"	C-50M	-	4.5	5.43	137.9	1.46	37.1	1.36	34.5	N/A
3/4"	C-75M	-	7.5	6.18	157.0	1.65	41.9	1.57	39.9	3 #6
1"	C-100M	-	12.5	7.16	181.9	1.98	50.3	1.79	45.5	3 #4
1-1/4"	C-125M	CR-125M	32.3	9.00	228.6	2.60	66.0	2.52	64.0	3 #2
1-1/2"	C-150M	CR-150M	35.3	9.07	230.4	2.80	71.1	2.52	64.0	3 #1/0
2"	C-200M	CR-200M	75	11.54	293.1	3.52	89.4	3.15	80.0	3 #4/0
2-1/2"	C-250M	CR-250M	153	15.28	388.1	3.98	101.1	4.45	113.0	3 #300MCM
3"	C-300M	CR-300M	181	15.39	390.9	4.65	118.1	4.45	113.0	3 #300MCM
3-1/2"	C-350M	CR-350M	300	18.30	464.8	5.43	137.9	5.53	140.5	3 #350MCM
4"	C-400M	CR-400M	330	18.30	464.8	5.74	145.8	5.53	140.5	3 #350MCM

